


Membrane injection system

for buildings without a basement

2LINE MIS25 1x6-13 PRO

For reliable sealing of fibre optic cables.

- **Controlled RESINATOR resin discharge thanks to proven membrane injection system**
- **Tool-free assembly with RESINATOR double syringe**
- **Horizontal or inclined installation up to 45° inclination**

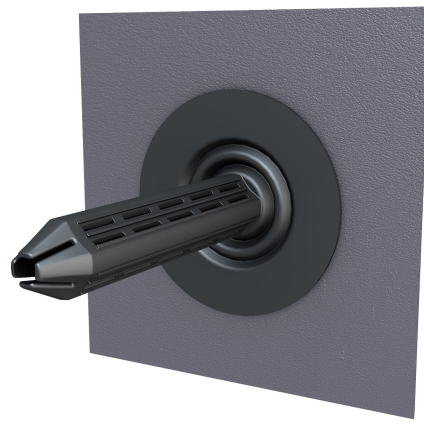

FACTS

Material:

- Waterproof concrete stress class 2, Waterproof concrete stress class 1
- Membrane sleeve: TPE
- Foil flange: Aluminium-plastic composite foil with butyl rubber
- Wall terminator element: PCFR

Advantages:

- Sealing in all common wall types (DIN 18533/WU concrete)
- Minimum RESINATOR resin quantity thanks to adhesive collar
- Small opening diameter Øi 25 mm
- Quick to assemble in just a few minutes

Scope of delivery:

- 1 piece of 2LINE MIS25
- 1 piece of RESINATOR dual syringe, 25 ml
- 1 piece of wall terminator element

Dimensions:

- Area of application: 1 fibre-optic cable with Øa 6 - 13 mm
- for drill holes Øi : 25 mm
- for wall thicknesses starting from 150 mm

FEATURES

Number of cables/medium: 1

Suitable for medium pipe OD (mm): 6-13 MM

PICTURES

