


2LINE Mini cable

2LINE-CBL-AU-Mini-18x12-A1-d8,2

Article no.: 3030652338

For outdoor use, can be blown into pipe systems.

- **Up to 576 fibres**
- **Very low attenuation in the cable**
- **Slim design**

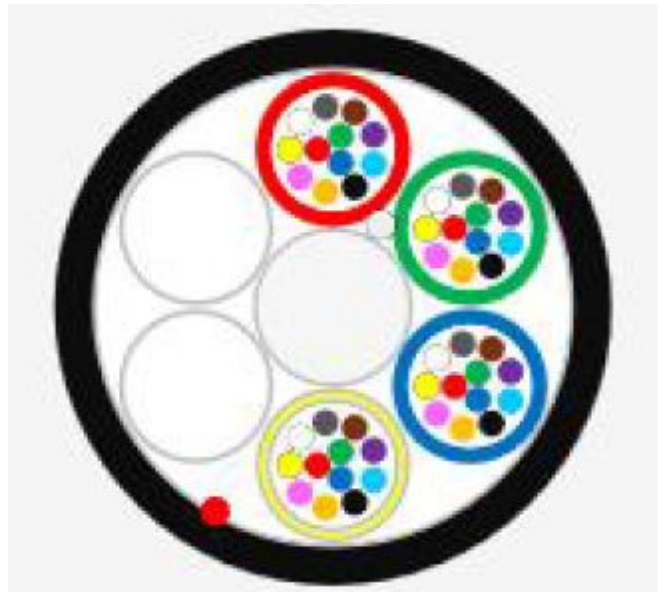

Picture may differ from selected product

Facts

Advantages:

- Central strain relief element: Glass fibre reinforced plastic rod, with PE sheathing if required.
- Buffer tube: Made of PBT plastic, contains 12 fibres and is filled with a suitable waterproof gel or dry filling compound.
- Stranding: Loose tubes are arranged in SZ stranding around the central element.
- Longitudinal watertightness: Dry cable core with swellable (water-absorbing) elements to prevent water propagation.
- Tear thread: 1 red tear thread under the outer sheath.

Dimensions:

- Standard cable lengths: 4 and 6 km (others available on request)

Properties:

- Fibre type: 9/125 G.657.A1
- Colour code: DIN0888
- Minimum bending radius (unloaded): 10 × cable diameter
- Minimum bending radius (loaded): 20 × cable diameter
- Outer sheath: Black HDPE (high-density polyethylene).
- Temperature range (storage): -30 °C to +70 °C
- Temperature range (operation): -30 °C to +70 °C

Tests/Standards:

- Tensile test IEC 60794-1-2-E1: tensile force for 1 min, reversible damping change, no damage
- Crush test IEC 60794-1-2-E3: 500 N / 10 cm, 1 min, reversible, no damage
- Impact test IEC 60794-1-2-E4: 2 J, bending radius = 300 mm, reversible change in damping, no damage.
- Repeated bending load IEC 60794-1-2-E6: Bending radius = 20 × D, 25 N, 25 cycles, reversible change in damping, no damage.
- Bending test IEC 60794-1-2-E11: Bending radius = 15 × D, 10 revolutions, 5 cycles, reversible change in damping, no damage.
- Torsion test IEC 60794-1-2-E7: 40 N, 5 cycles, ± 1800°, reversible attenuation change, no damage.
- Temperature change test IEC 60794-1-2-F1: -30 °C to +70 °C, 12 h per cycle, $\Delta\alpha \leq 0.15$ dB/km, no damage.
- Water ingress test IEC 60794-1-2-F5: 3 m cable, 1 m immersion depth, 24 h, no water ingress.

Features

Cable diameter:	8,2
Fiber count:	216
Number of tubes:	18
Weight:	60 ± 15 kg/km
Fiber diameter with coating:	250 µm
Tensile force:	600 N